

PRESSURES

Inlet pressure	max. 40 bar
Outlet pressure	1,5 - 20 bar

CONNECTIONS

Male thread acc. ISO 7 (R 1/2" up to R 2")

SEALS AND TEMPERATURES

NBR	-15 °C up to +100 °C
EPDM	-30 °C up to +130 °C /only DN 40 & DN 50
FKM	-10 °C up to +190 °C

FEATURES


- pressure compensation
- diaphragm-controlled
- continuously adjustable outlet pressure
- with integrated strainer filter
- replaceable inner parts/cartridge principle
- double-sided G 1/4" manometer fitting
(for outlet pressure)
- assembly position: any desired, preferably vertical
- min. pressure difference (inlet / outlet pressure): 1 bar

MEDIA

- aggressive water / other aggressive liquids
- air and neutral gases (at higher flow rates)

CONFORMITY / CUSTOMS TARIFF NUMBER / CLASSIFICATION SOCIETIES

- DGRL 2014/68/EU
- Customs tariff number 848 110 05
- Certifiable by external classification societies
e.g. DNV

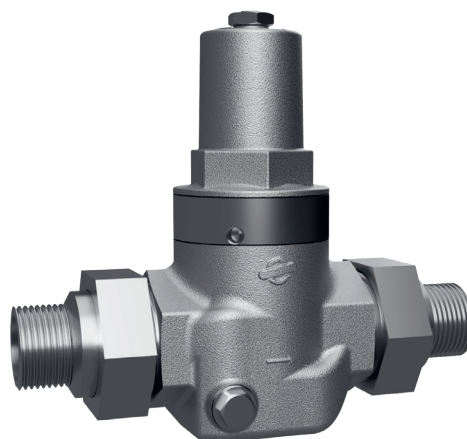

Nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

Type

A

B

max. inlet pressure [bar]

DRV 724-R	40	40
DRV 725-R	40	40

outlet pressure [bar]

DRV 724-R	1,5 - 12	1,5 - 12
DRV 725-R	2,0 - 20	2,0 - 20

dimensions [mm]


	G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	b	105	105	122	122	160	160
all types	b1	168	168	195	195	250	250
	h1	29	29	38	38	39	39
	h	133	133	133	133	243	243


weight [kg]

DRV 724-R	1,9	1,9	3,2	3,3	8,0	7,9
DRV 725-R	2,0	2,0	3,3	3,3	8,0	8,0

kvs-value [m³/h]

all types	2,9	3,9	5,4	6,1	9	13
-----------	-----	-----	-----	-----	---	----

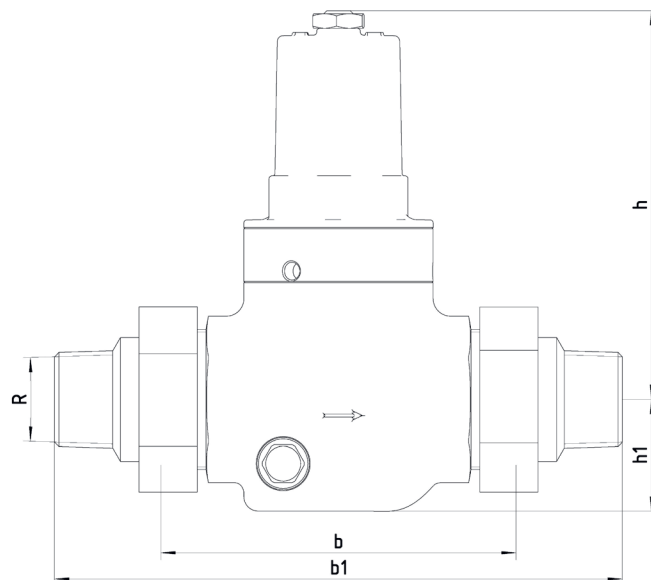



Article numbers and options

Article numbers

Nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

Standard version

DRV 724-R	072402-R0XXX	072403-R0XXX	072404-R0XXX	072405-R0XXX	072406-R0XXX	072407-R0XXX
DRV 725-R	072502-R0XXX	072503-R0XXX	072504-R0XXX	072505-R0XXX	072506-R0XXX	072507-R0XXX

Options overview

CC - connections

R0 - ISO 7

M - material of wetted inner parts

3 - stainless steel 1.4404
 9 - stainless steel 1.4404 (including internal parts of the spring bonnet)

E - elastomers

3 - FKM standard
 1 - NBR
 2 - EPDM only DN 40 & DN 50

F - finishes

0 - without additional finishes

Configuration example of an article number with additional options

art.no. standard version						-	C	C	M	E	F
0	7	2	5	0	7	-	R	0	3	3	0

inlet pressure: 25 bar
 seals: FKM

outlet pressure: 5 bar
 temperature: 30 °C

connection: 2" ISO 7
 without additional finishes

Manometer

diameter	connection	body	pressure range	max. temp.	art.no.
63 mm	G 1/4", central back	stainless steel	0 - 10 bar	190 °C	009014
63 mm	G 1/4", central back	stainless steel	0 - 20 bar	190 °C	009017

Materials

	body	spring bonnet	seals	wetted inner parts	max. temperature
standard	stainless steel 1.4408	stainless steel 1.4408	EPDM, FKM, NBR	stainless steel 1.4404	190 °C

Flow diagram

