

PRESSURES

inlet pressure max. 12 bar

CONNECTIONS


Male thread acc. ISO 228 (G 3/8" up to G 3")

SEALS AND TEMPERATURES

EPDM 0 °C up to +130 °C

FEATURES

- replaceable innerparts
- elobrated lever construction
- dirt-resistant control flap
- float arm can be shortened
- connection for immersion pipe
- floats optionally in copper or stainless steel

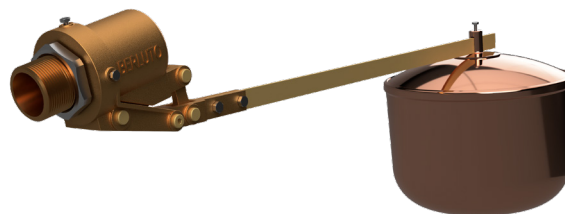

MEDIA

- drinking water
- neutral, non-sticky liquids

CUSTOMS TARIFF NUMBER

- Customs tariff number 848 180 81

Nominal size	10	15	20	25	32	40	50	65	80
G	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"

max. working pressure [bar]

RSV O	12
-------	----

dimensions [mm]

RSV O	L	393	524	543	618	692	750	877	1013	1014
	L1	40	40	42	47	45	46	51	70	70

weight [kg]


RSV O	0,9	1,4	1,8	2,7	4,1	4,9	7,1	11,5	12,5
-------	-----	-----	-----	-----	-----	-----	-----	------	------


kvs-value [m³/h]

RSV O	0,6	1,8	3,8	7,6	14,0	23,0	34,0	47,0	47,0
-------	-----	-----	-----	-----	------	------	------	------	------

dimensions float [mm]

copper	D	153	153	174	209	232	257	308	353	353
	H	116	116	128	172	199	221	254	285	285
stainless steel	D	--	179	246	200	240	240	280	305	305
	H	--	90	107	200	180	240	280	305	305

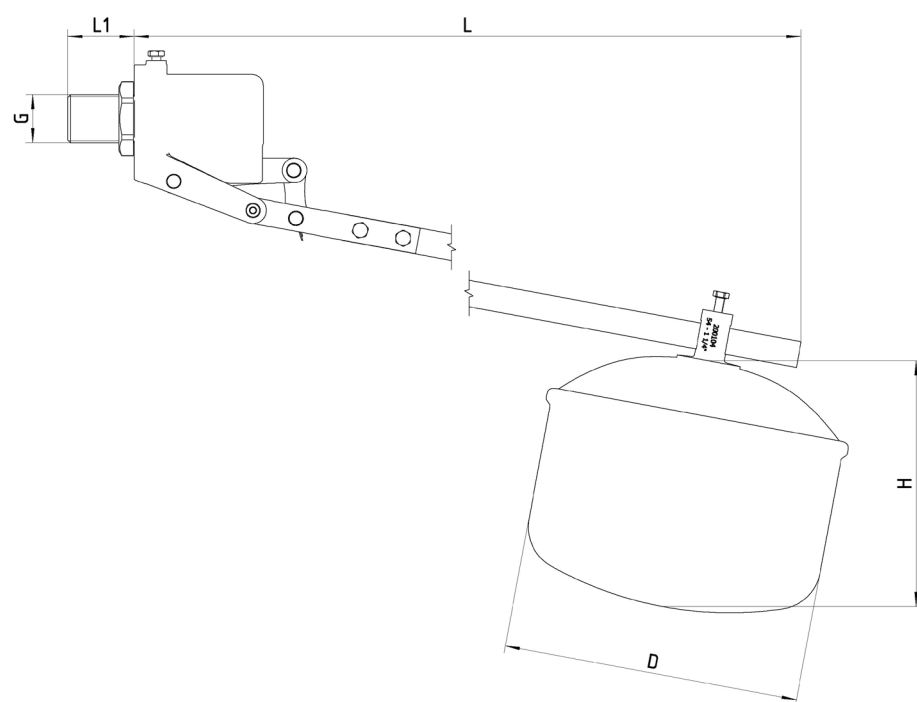



Article numbers, Materials and Flow diagram

Article numbers

Nennweite	10	15	20	25	32	40	50	65	80
G	3/8"	1/2"	3/4	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"

Standard version

RSV O	000401	000402	000403	000404	000405	000406	000407	000408	000409
-------	--------	--------	--------	--------	--------	--------	--------	--------	--------

Float

copper - CU	000802	000802	000803	000804	000805	000806	000807	000808	000808
stainless steel - V4A	--	000842	000843	000844	000845	000846	000847	000848	000848

Materials

	body	wetted parts	float arm	cap	seals	max. temperature
RSV O	brass	brass	brass	brass	EPDM	130 °C

Float diagram

