

PRESSURES

inlet pressure max. 12 bar

CONNECTIONS

Male thread acc. ISO 228 (G 3/8" up to G 1/2")

SEALS AND TEMPERATURES

NBR 0 °C up to +100 °C

FEATURES

- float arm can be shortened
- control flap
- floats optionally in hostalen, copper or stainless steel

MEDIA

- water
- neutral, non sticky liquids

CUSTOMS TARIFF NUMBER

- Customs tariff number 848 180 81



Nominal size	10	15
G	3/8"	1/2"

max. working pressure [bar]

SV 94 MS	12	12
----------	----	----

dimensions [mm]


SV 94 MS	L	329	329
	L1	32	40


weight [kg]

SV 94 MS	0,3	0,4
----------	-----	-----

kvs-value [m³/h]

SV 94 MS	0,2	0,3
----------	-----	-----

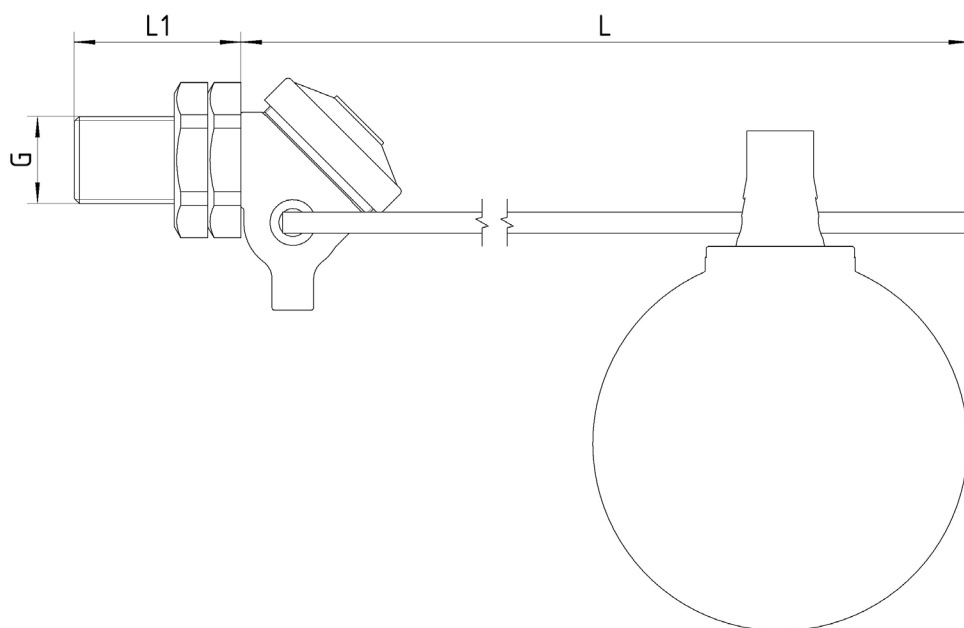



Article numbers, Materials and Flow diagram

Article numbers

Nominal size	10	15
G	3/8"	1/2"

Standard version

SV 94 MS	000711	000712
----------	--------	--------

Float

plastic - PE	000831	000831
copper - CU	000800	000800
stainless steel - V4A	000841	000841

Materialien

	body	wetted inner parts	float arm	cap	seals	max. temperature
SV 94 MS	brass	brass	brass	brass	NBR	100 °C

Flow diagram

